

HIGH PERFORMANCE ENTRANCE MATTING

INTRAgrille

A superb example of engineered stainless steel. With a striking linear appearance, this versatile product provides a stunning architectural finish for applications where only the best will suffice.



STRENGTH RATING - EXTREME




ZONAL OPTION - 1 AND 2



WIDE RANGE OF DESIGN OPTIONS



WARRANTY - 10 YEARS

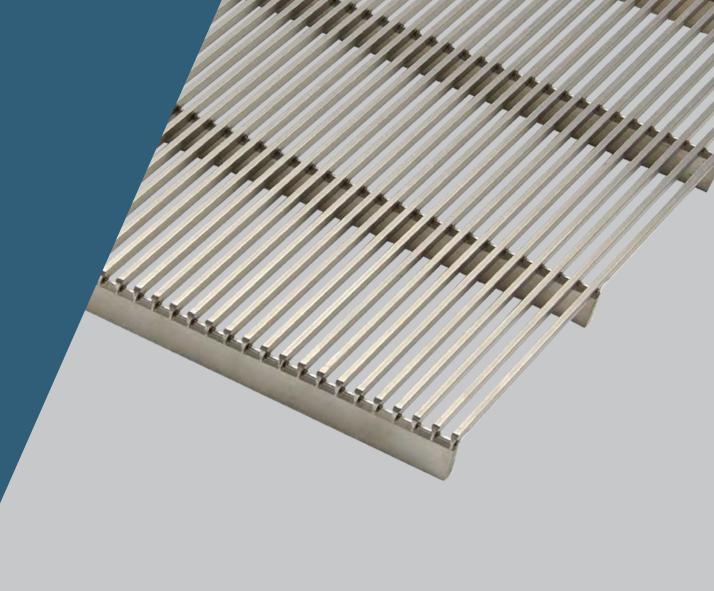


SPECIFICATION



- Triangular profiles
- Support profiles slot
- Openings support
- Profile pitch

PROFILE



- Grid with supporting frame
- Matwell / Air Conditioning / Lighting Void
- 3mm fixing plate
- Location fixing bolt
- Can be fixed horizontally or vertically (floor wall)

PROFILE AND SUPPORT ROD COMBINATIONS




unit of measurement: [mm] / scale: 1:1

Typical Combinations

A Tri Profile	Support Profile	Slot Opening	Support Profile Pitch	Overall depth	Typical span (Foot Traffic)	Weight Kg/m²	Airflow
T2850	10 x 2mm	3mm	50mm	13.5mm	300mm	16kg/m²	52% open
T3465	10 x 2mm	3mm	50mm	15mm	300mm	21kg/m²	47% open
T5050/R	10 x 2mm	4mm	50mm	13.5mm	300mm	14kg/m²	44% open
T5060	15 × 2mm	4mm	50mm	19.5mm	400mm	22kg/m²	44% open
T5060	40 x 3mm	4mm	100/50mm	44.5mm	1100/1400mm	26kg/m²	44% open

A wide range of other profile/combination designs are available, as are textured/coloured finishes. Please contact to discuss your specific application.

INTRAchannel



Stainless steel narrow edge drainage channel.

Please contact us to specify details such as overall length, width, outlet type and location:


- Options available to suit wide variety of applications Adjustable feet to suit drainage falls
- Suitable for internal and external applications


.113

Example section drawing







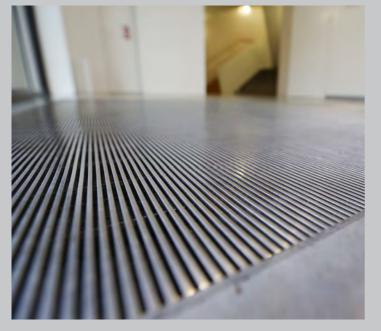

INTRAgrille

	2	3
1	5	4

- Newport Street Gallery
 Commercial Office
 The Opera Terrace, London
 Commercial Office
 Newport Street Gallery



