

HIGH PERFORMANCE ENTRANCE MATTING

INTRAlux Premier

A high quality polyamide fibre made from 100% recycled Econyl yarn and fire rated to Bfls-1. Premier provides exceptional dirt and moisture removal to protect internal floor coverings.



STRENGTH RATING - MEDIUM




ZONAL OPTION - 2+3



BASIC RANGE OF DESIGN OPTIONS




WARRANTY - 5 YEARS

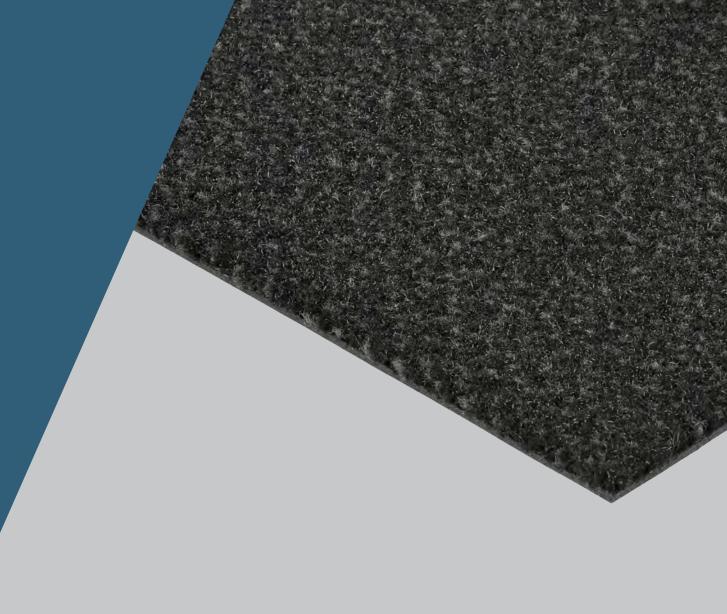

SPECIFICATION

| Product Reference | INTRAlux Premier, Polyamide Sheet Fibre Barrier Matting | |
|-------------------|---|--|
| Material | 900g/m² pile weight 100% recycled Econyl polyamide fibre | |
| Installation | With surface of mat level with adjoining floor coverings Surface mounted with low profile ramped edging trim - see INTRAlux Gripfit on page 140 | |
| Location | Zones 2+3 | |
| Construction | High content PVC Backing with Polyamide Pile | |
| Weight | 3.74kg/m2 | |
| Depth | 8.0mm | |
| Fire Rating | Bfl-s1 | |
| Roll Size | 20m x 2m | |
| Sustainability | 100% Econyl fibre, phthalate free backing | |

PROFILE

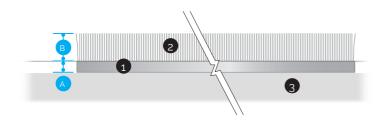

- A 2mm
- B 6mm
- 1 PVC Backing
- 2 Fibre Pile
- 3 Subfloor

For full specification details request our INTRAlux sample folder

COLOURS



130 Black




138 Slate Grey

.123





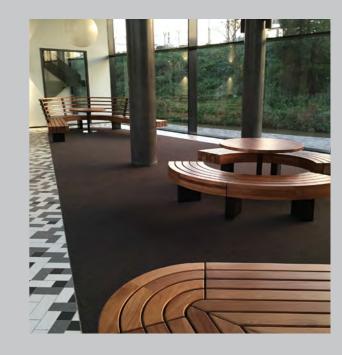



INTRAlux Elite INTRAlux Premier INTRAlux Ultima

| | 2 | 3 |
|---|---|---|
| 1 | 5 | 4 |

- University
 Museum
 University
 Exhibition Hall
 Shopping Centre



