



INTRAFLEX[®] XT



INTRAFLEX



INTRAFLEX® XT

At the forefront of entrance matting design and innovation, this product has been used extensively throughout the UK at high profile locations, providing optimum durability, performance and aesthetics.

- Heavy-duty recessed aluminium system
- Removable sections for ease of maintenance
- **Flexible** construction for ease of matwell cleaning
- Suitable for internal and external applications
- A combination of rubber/brush/fibre inserts available for 'Zonal' system
- Heel-proof **open or closed construction**, suitable for high traffic areas




Zonal
Options



Strength
Rating



10 Year
Warranty

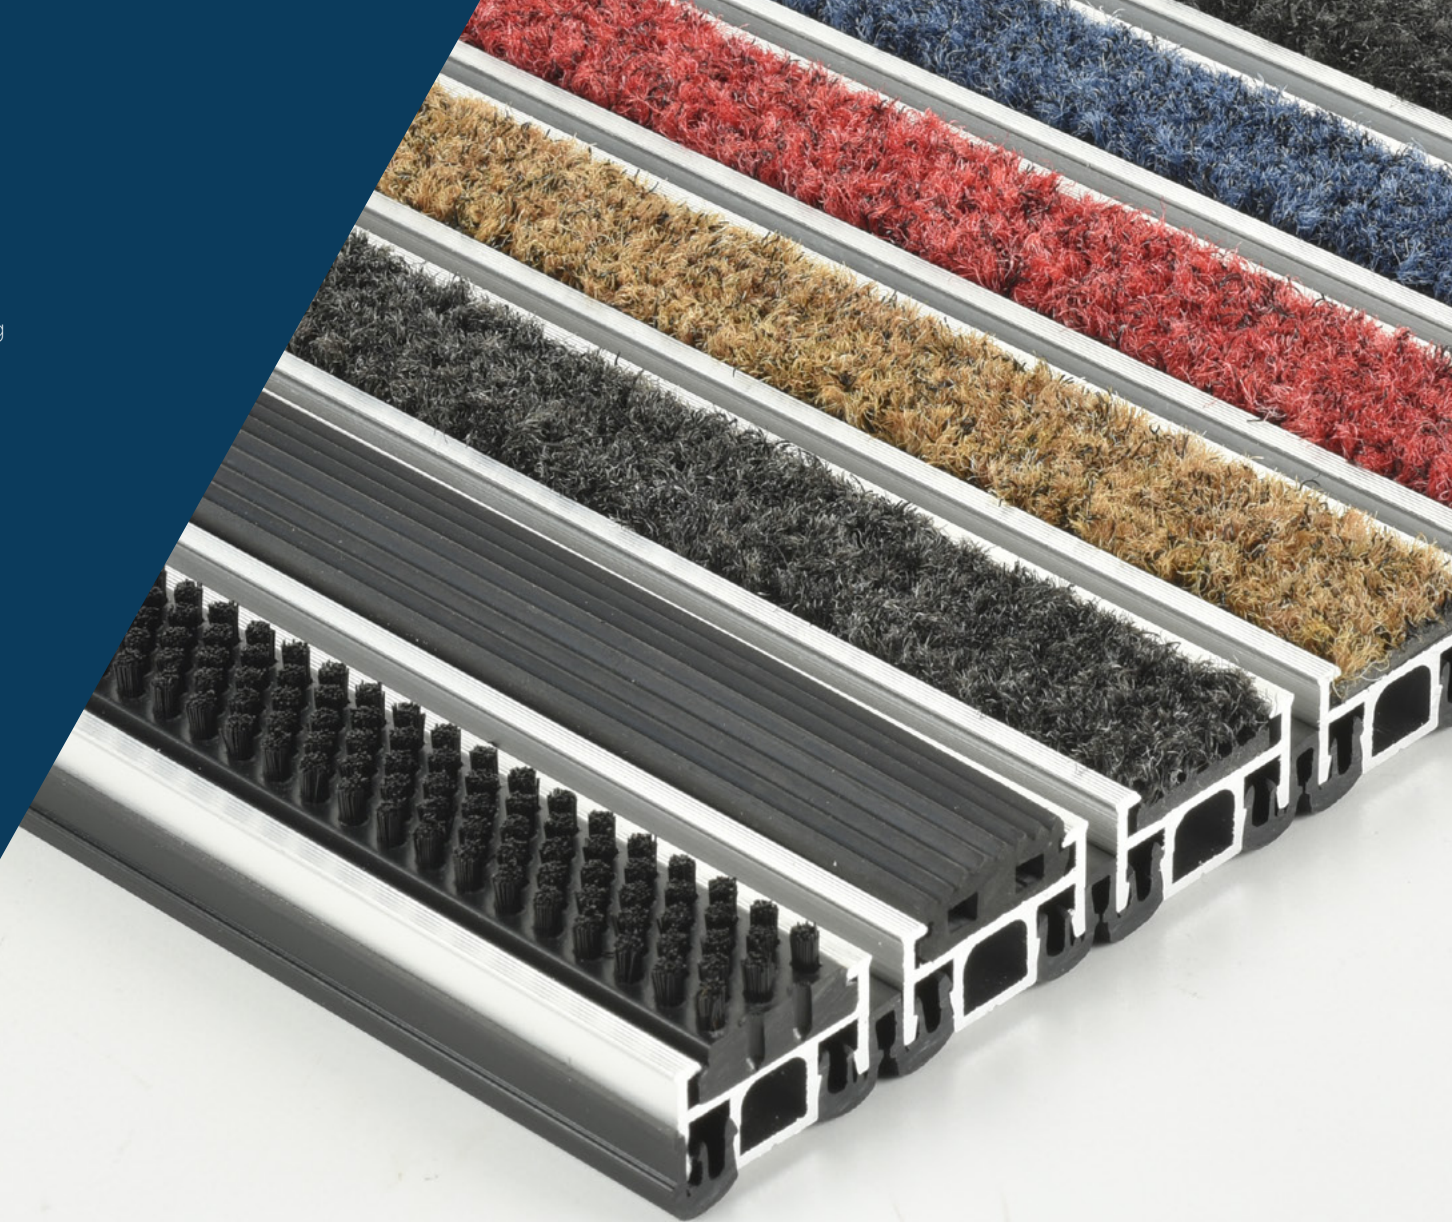

ECONYL®
100% Regenerated Nylon

PUREBASE®




SPECIFICATION

INTRAflex® XT


Product Reference	INTRAflex® XT recessed aluminium entrance matting
Strength Rating	High - suitable for areas with heavy foot and wheeled traffic
Zonal Location	Use Zone 1 inserts for external areas Use Zone 2 inserts for internal areas Combination Zone 1 & 2 inserts can be specified for dual performance
Construction	Heel proof open construction - allows dirt and moisture to fall through into the matwell below Closed construction - solid connecting strip preventing debris falling through into matwell
Sustainability	100% recycled aluminium All inserts recyclable/re-usable 100% Econyl® fibre (Elite, Ultimate & Select)
Typical Application	Extreme & high traffic locations such as airports, stations, shopping centres, commercial offices etc
Design Options	Bespoke anodised to special order
Weight	21.1kg/m ²
Matwell Framing	INT021
Slip Rating	Will vary with insert, in excess of PTV 38
Warranty	10 years
Uniclass 2015	Pr_35_57_11_26 Entrance Mats
CAWS	N10/300 Entrance Matting

PROFILE

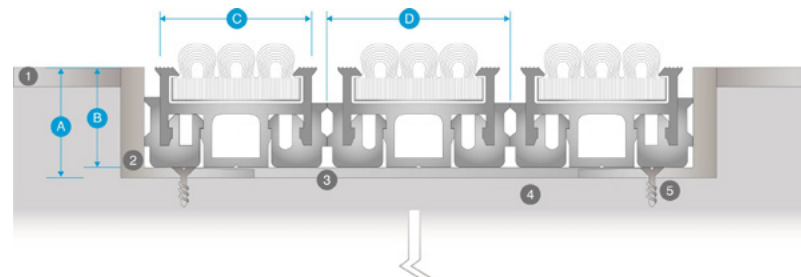

- A 21mm
- B 19mm
- C 28mm profile
- D 33.25mm plank size
- 1 Finished floor surface
- 2 Recessed matwell frame
- 3 Levelling latex to matwell base
- 4 Screed sub-floor
- 5 Screw fixings

PROFILE COLOUR OPTIONS

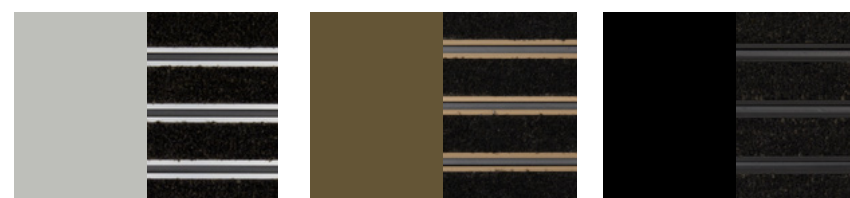

Standard

Bronze

Black




INSERTS


INSERTS - ZONE 2

INTRALux® Elite

Recommended for effective scraping and dirt removal

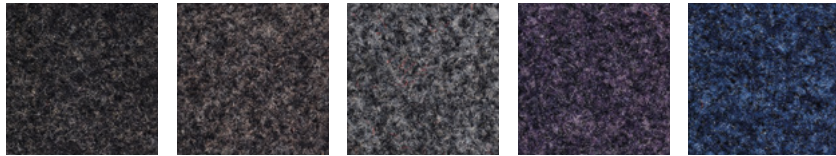


608 Black 607 Anthracite 606 Grey 609 Purple 602 Blue

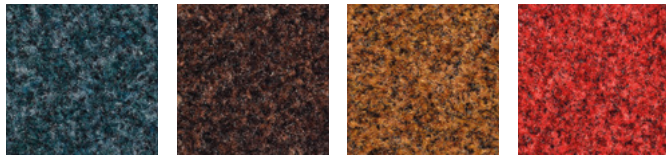

610 Turquoise 605 Brown 604 Coco 601 Red

INTRALux® Linear



443 Anthracite 451 Grey

INTRALux® Select




207 Grey 208 Black

INTRALux® Ultimate

Recommended for rapid moisture absorption



906 Night Sky 907 Anthracite 910 Stone 912 Lichen 913 Forest Green

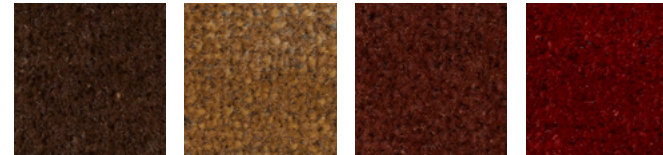

905 Truffle 904 Sandstone 914 Terracotta 901 Ruby

INSERTS - ZONE 1



Brush Fine Brush Ribbed Rubber Multi Directional Rubber



ENVIRONMENT & SUSTAINABILITY

INTRAsystems has an undeviating commitment to act responsibly in its care of the environment. Working on key projects throughout the UK and Europe, the company is familiar with all environmental ratings such as Ska, BREEAM and WRAP to help clients achieve, and exceed, their sustainability goals.

We are ISO 14001 accredited and all production processes are managed in accordance with the Waste Management Act, with a clear goal to 'reduce the production of waste and its harmful effects.' INTRAsystems regularly reviews its wider operations to minimise negative environmental impacts.

Our Environmental Sustainability Statement sets clear targets for ongoing improvement to ensure the company continues to play its part in helping tackle the climate crisis. Environmental credentials for each fibre option are provided and highlighted throughout this brochure.



BREEAM®

ECONYL®

Benefits of specifying ECONYL® fibre


ECONYL® is regenerated nylon that would otherwise pollute the Earth. It is the same as brand new nylon and can be infinitely recycled, recreated and remoulded. ECONYL® is Cradle-to-Cradle certified and therefore our fibres are eligible for LEED® v4 points, as part of the LEED green building rating system.

PUREBASE®

Benefits of specifying PureBase backing

PureBase is a new, PVC-free backing material for entrance matting. It has a significantly lower environmental impact in terms of production processing, greenhouse gas emissions and end of life waste disposal. PureBase is 20% lighter and 3 x more flexible for easier handling and installation.



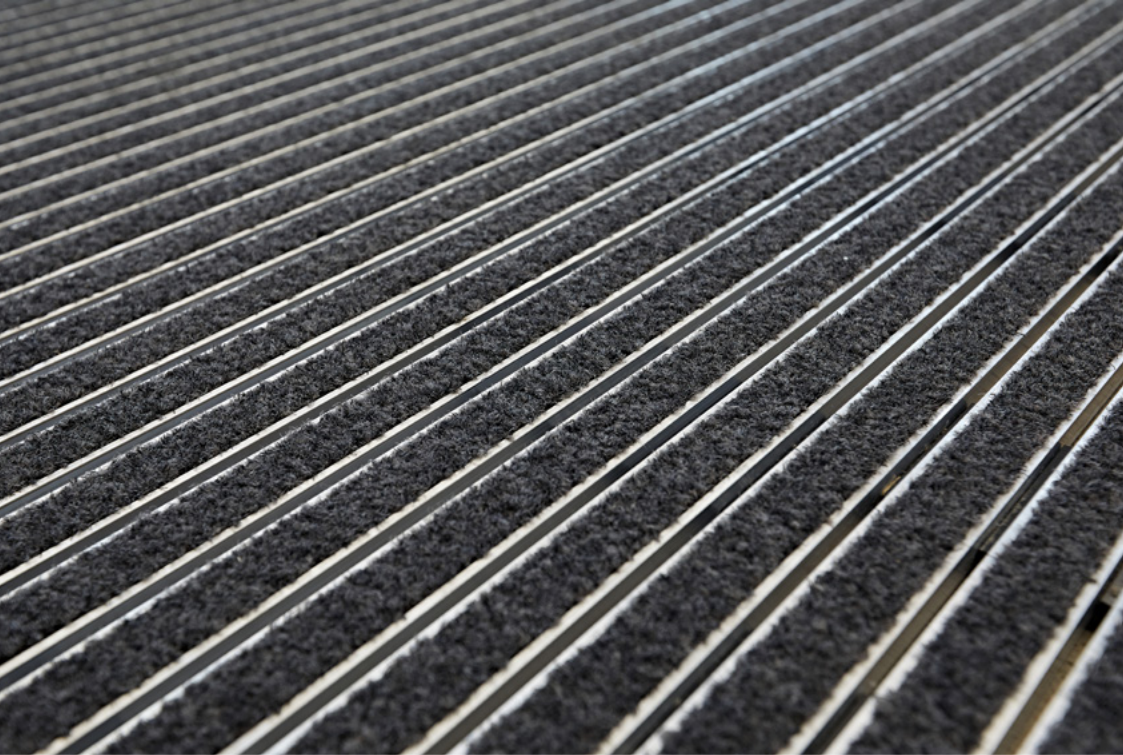



Find us on:  NBS



INTRA. SYSTEMS

6 COBHAM ROAD, WIMBORNE, DORSET, BH21 7PE
01425 472000 INTRASYSTEMS.CO.UK

INTRAFLEX® XT V1.1