






INTRAFORM® DM MODULAR



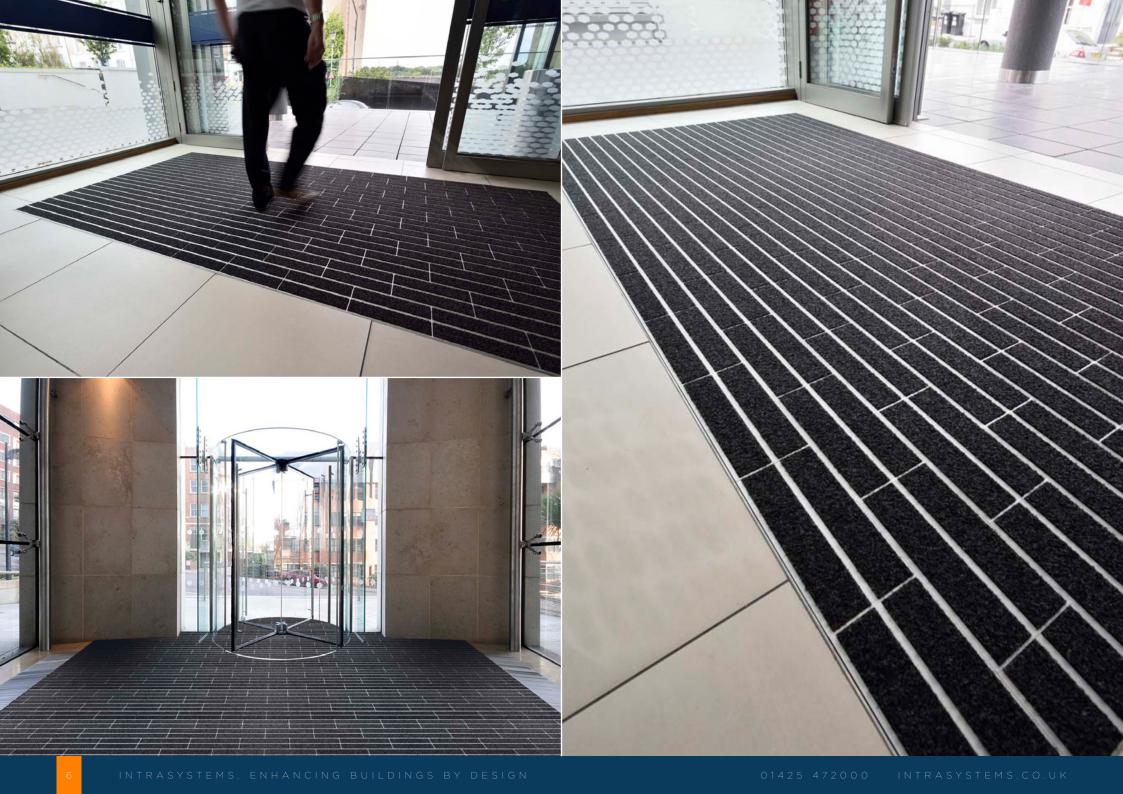

INTRAFORM® DM MODULAR

Aluminium modular tile system for creative entrance design. Available with a full range of rubber and fibre inserts for internal and external applications.

- Unique aluminium Entrance Matting in a box off the shelf for next day service.
- Tile format for ease of installation
- Tiles can be easily replaced in the event of damage
- **Full range** of rubber and fibre inserts available for internal and external applications.




Zonal Options



Strength Rating



10 year Warranty

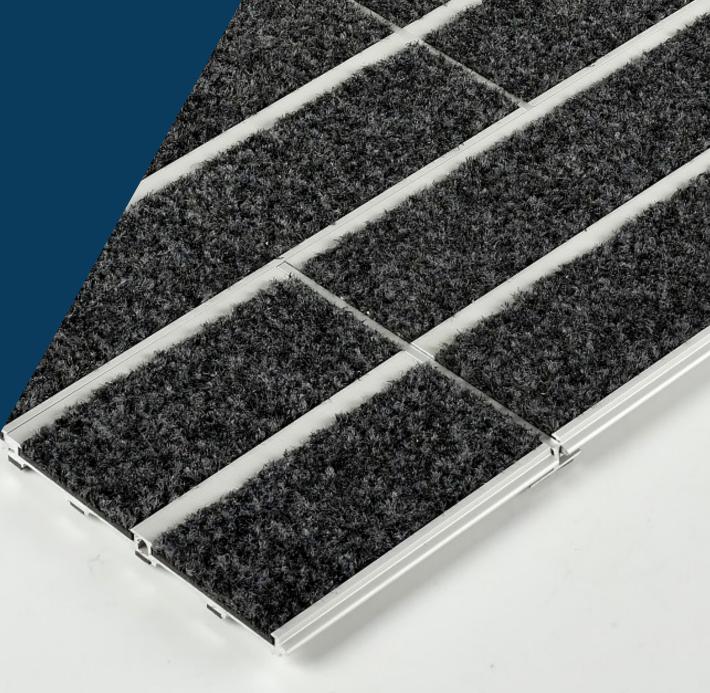








SPECIFICATION

INTRAform® DM Modular


| Product Reference | INTRAform DM Modular Entrance Matting |
|---------------------|---|
| Strength Rating | High - suitable for areas with heavy foot and wheeled traffic |
| Zonal Location | Use Zone 1 inserts for external areas Use Zone 2 inserts for internal areas Combination Zone 1 & 2 inserts can be specified for dual performance Surface mounted applications with use of ramped edging |
| Construction | 100% recycled aluminium construction. Closed construction Interlocking Plank system. |
| Sustainability | 100% recycled aluminum. All inserts recyclable/re-usable 100% Econyl Fibre (Elite, Ultimate & Select) |
| Typical Application | High Traffic locations such as Shopping Centres, Commercial Offices, Retail stores etc |
| Design Options | Wide range of design options available Bespoke anodised to special order |
| Weight | 11.2kg/m2 |
| Matwell Framing | INTO19 |
| Slip Rating | Will vary with insert, in excess of PTV 38 |
| Warranty | 10 years |
| Uniclass 2015 | Pr_35_57_11_26 Entrance Mats |
| CAWS | N10/300 Entrance Matting |


PROFILE

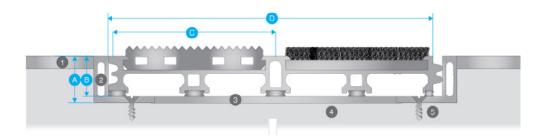

- **A** 19mm
- **B** 17mm
- C 66.4mm module
- D 132.8mm plank size
- 1 Finished floor surface
- 2 Recessed matwell frame
- 3 Levelling latex to matwell base
- 4 Screed sub-floor
- 5 Screw fixings

PROFILE COLOUR OPTIONS







Black



INSERTS


INSERTS - ZONE 2

INTRAlux® Elite

Recommended for effective scraping and dirt removal



INTRAlux® Linear



451 Anthracite Grey

INTRAlux® Select



INTRAlux® Ultimate

Recommended for rapid moisture absorption




INSERTS - ZONE 1





PUREBASE®

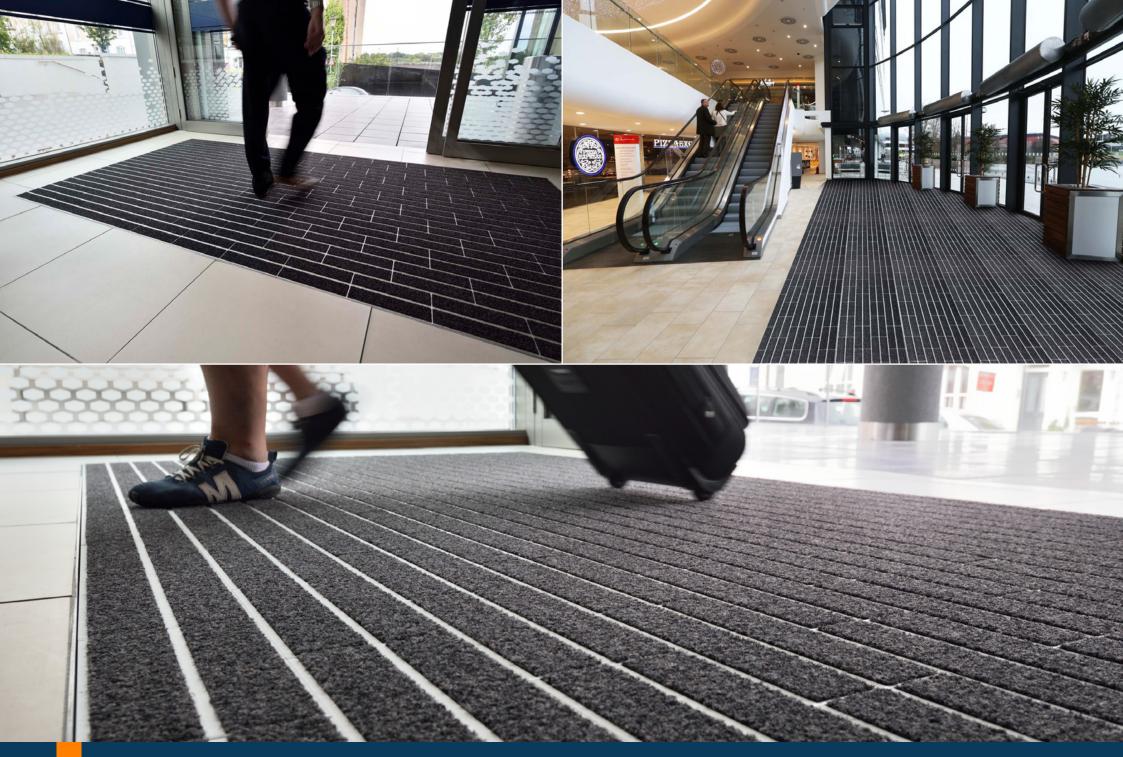

ENVIRONMENT & SUSTAINABILITY

INTRAsystems has an undeviating commitment to act responsibly in its care of the environment. Working on key projects throughout the UK and Europe, the company is familiar with all environmental ratings such as Ska, BREEAM and WRAP to help clients achieve, and exceed, their sustainability goals.

We are ISO 14001 accredited and all production processes are managed in accordance with the Waste Management Act, with a clear goal to 'reduce the production of waste and its harmful effects.' INTRAsystems regularly reviews its wider operations to minimise negative environmental impacts.

Our Environmental Sustainability Statement sets clear targets for ongoing improvement to ensure the company continues to play its part in helping tackle the climate crisis. Environmental credentials for each fibre option are provided and highlighted throughout this brochure.



BREEAM®



Benefits of specifying ECONYL® fibre

ECONYL® is regenerated nylon that would otherwise pollute the Earth. It is the same as brand new nylon and can be infinitely recycled, recreated and remoulded. ECONYL® is Cradle-to-Cradle certified and therefore our fibres are eligible for LEED® v4 points, as part of the LEED green building rating system.

PUREBASE

Benefits of specifying PureBase backing

PureBase is a new, PVC-free backing material for entrance matting. It has a significantly lower environmental impact in terms of production processing, greenhouse gas emissions and end of life waste disposal. PureBase is 20% lighter and 3 x more flexible for easier handling and installation.









6 COBHAM ROAD, WIMBORNE, DORSET, BH21 7PE 01425 472000 INTRASYSTEMS.CO.UK