


HIGH PERFORMANCE ENTRANCE MATTING

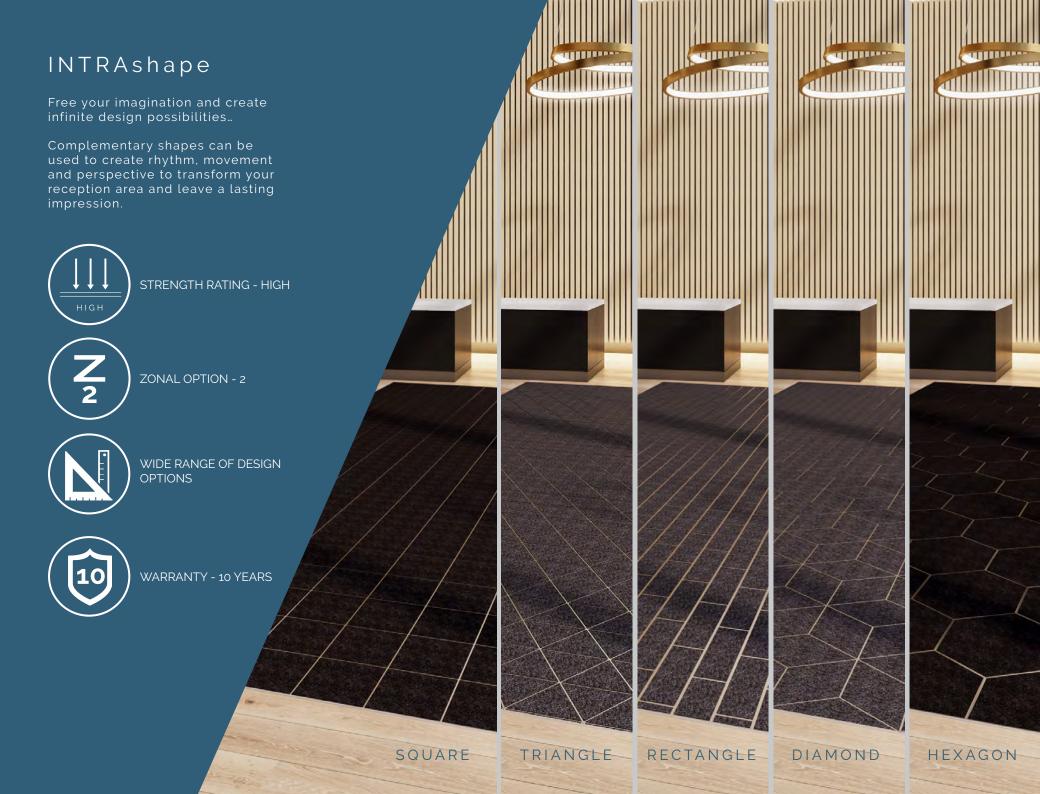

SPECIFICATION

Product Reference	INTRAshape Entrance Matting	
Shape	Small Square – 230mm x 230 mm Large Square – 460mm x 460mm	
	Small Triangle – 230mm Large Triangle – 460mm	
	XS Rectangle – 115mm x 345mm Small Rectangle – 230mm x 460mm Medium Rectangle – 230mm x 690mm Medium Slim Rectangle – 115mm x 690mm Large Rectangle – 460mm x 690mm	
	Small Diamond – 230mm x 230mm Medium Slim Diamond – 115mm x 690mm (45°Angle) Large Diamond – 460mm – 460mm (60°Angle)	
	Small Hexagon – 230mm	
Installation	Into suitable recessed matwell area, with surface of the matting level with adjoining floor coverings.	
Location	High Traffic environments Internal applications	
Construction	Aluminium composite panel with high quality polyamide fibre surface	
Weight	12.8 kg/m ²	
Depth	16mm	
Temp Resistance	-20°C - +70°C	
Matwell Framing	INTO19	
Design Options	Standard Silver Anodised, Bronze Anodised and Black Anodised Bespoke anodised to special order	
Backing	Cushion EPDM/Neo Sponge	
Sustainability	100% recycled aluminum. All inserts recyclable/re-usable 100% Econyl Fibre (Premier and Elite)	

INSERTS

Elite Polyamide




Premier Polyamide




Select Polyamide




Linear Polypropylene



CROSS SECTION



PROFILE COLOUR OPTIONS











INTRAshape

	2	3
1	5	4

- Nandos, Warrington
 Nandos, Warrington
 Commercial Office
 Nandos, Warrington
 Commercial Office



