






INTRALUX® PREMIER



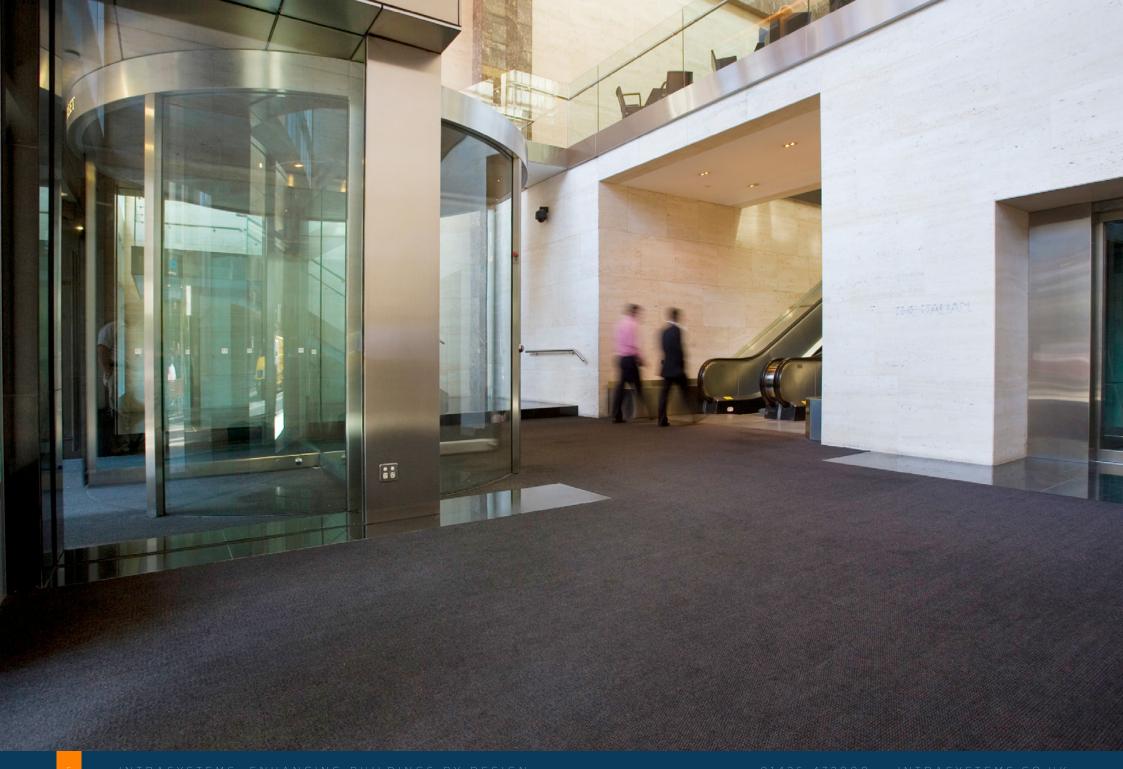




SPECIFICATION

INTRAlux® Premier

Product Reference	INTRAlux Premier, Polyamide 50x50cm Tile Fibre Barrier Matting
Material	100% recycled Econyl polyamide fibre
Installation	With surface of mat level with adjoining floor coverings Surface mounted with low profile ramped edging trim - INTRAlux Gripfit
Location	Zone 3
Construction	PVC Backing with Polyamide Pile
Sustainability	100% Econyl fibre
Weight	Total weight 4000 g/m ² Pile weight 900g/m ²
Matwell Framing	Gripfit/ INTR006/ INT014
Depth	9mm
Fire Rating	Cfl-s1
Tile Size	50x50 cm
Uniclass	Pr_35_93_96_87 Tile matting
CAWS	M50/130 Carpet tiling

COLOUR



135 Grey

PROFILE



- A 2mm
- B 7mm
- 1 PVC backing
- 2 Fibre pile
- 3 Subfloor



ENVIRONMENT & SUSTAINABILITY

INTRAsystems has an undeviating commitment to act responsibly in its care of the environment. Working on key projects throughout the UK and Europe, the company is familiar with all environmental ratings such as Ska, BREEAM and WRAP to help clients achieve, and exceed, their sustainability goals.

We are ISO 14001 accredited and all production processes are managed in accordance with the Waste Management Act, with a clear goal to 'reduce the production of waste and its harmful effects.' INTRAsystems regularly reviews its wider operations to minimise negative environmental impacts.

Our Environmental Sustainability Statement sets clear targets for ongoing improvement to ensure the company continues to play its part in helping tackle the climate crisis. Environmental credentials for each fibre option are provided and highlighted throughout this brochure.



BREEAM®



Benefits of specifying ECONYL® fibre

ECONYL® is regenerated nylon that would otherwise pollute the Earth. It is the same as brand new nylon and can be infinitely recycled, recreated and remoulded.

ECONYL® is Cradle-to-Cradle certified and therefore our fibres are eligible for LEED® v4 points, as part of the LEED green building rating system.





