

# INTRAFORM® DM



INTRV

# INTRAFORM® DM

INTRAFORM® DM Entrance Matting system benefits from double-width fibre inserts that have been specifically designed to provide superior dirt and moisture absorption and retention.

With its heavy-duty closed construction aluminium planks, INTRAFORM® DM can withstand heavy loads, offering superb durability. Compatible with our full range of rubber and fibre inserts.

- **Heavy-duty** aluminium plank system
- **Optimum moisture absorption** from extra width fibre inserts
- **Interlocking sections** for ease of installation
- **Compatible** with standard INTRAFORM® system
- Fully **DDA compliant**, suitable for wheelchair access
- Compatible with full range of inserts
- Exceptionally hardwearing and durable




Zonal  
Options



Strength  
Rating



10 Year  
Warranty

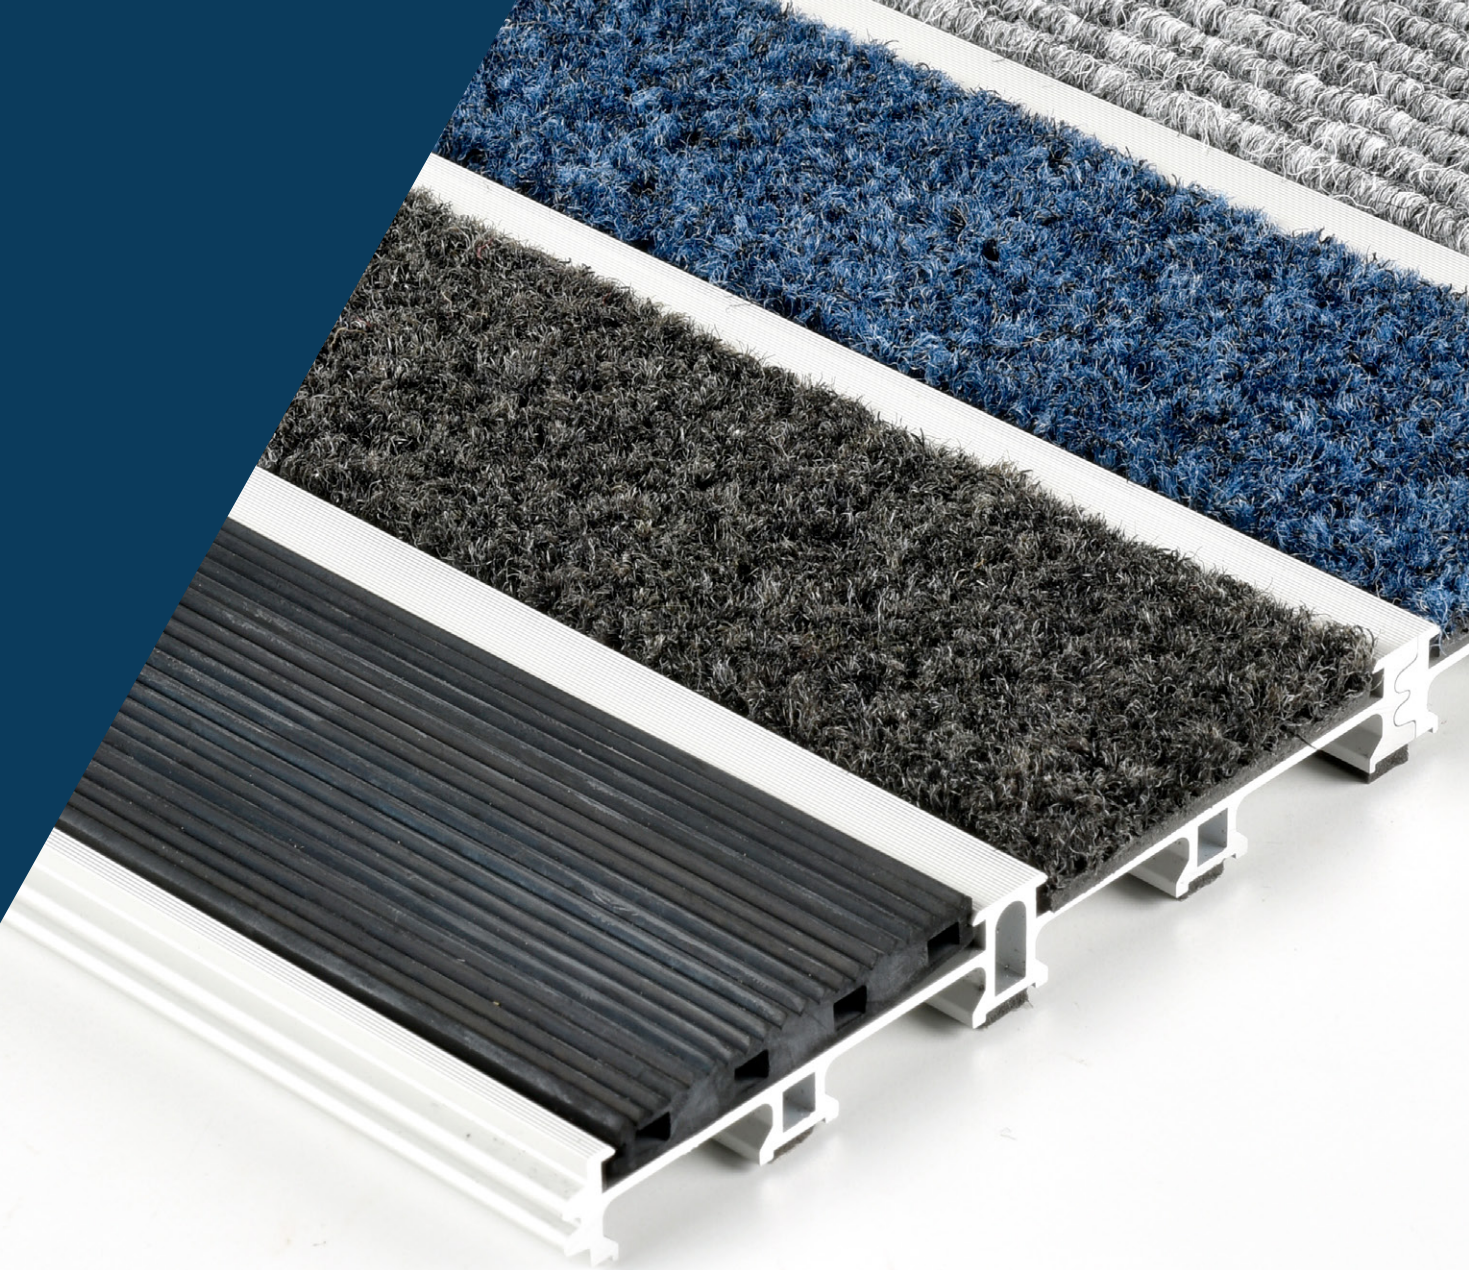

**ECONYL®**  
100% Regenerated Nylon

**PUREBASE®**




# SPECIFICATION

## INTRAform® DM


<b>Product Reference</b>	INTRAform® DM entrance matting
<b>Strength Rating</b>	Extreme – suitable for areas with heavy foot and wheeled traffic
<b>Zonal Location</b>	Use Zone 1 inserts for external areas Use Zone 2 inserts for internal areas Combination Zone 1 & 2 inserts can be specified for dual performance
<b>Construction</b>	100% recycled aluminium construction. Closed construction interlocking plank system.
<b>Sustainability</b>	100% recycled aluminium. All inserts recyclable/re-usable 100% Econyl® fibre (Elite, Ultimate & Select)
<b>Typical Application</b>	Extreme & high traffic locations such as airports, stations, shopping centres, commercial offices, retail stores etc
<b>Design Options</b>	Wide range of design options available Bespoke anodised to special order
<b>Weight</b>	12.2kg/m2
<b>Matwell Framing</b>	INT019
<b>Slip Rating</b>	Will vary with insert, in excess of PTV 38
<b>Warranty</b>	10 years
<b>Uniclass 2015</b>	Pr_35_57_11_26 Entrance Mats
<b>CAWS</b>	N10/300 Entrance Matting

## PROFILE

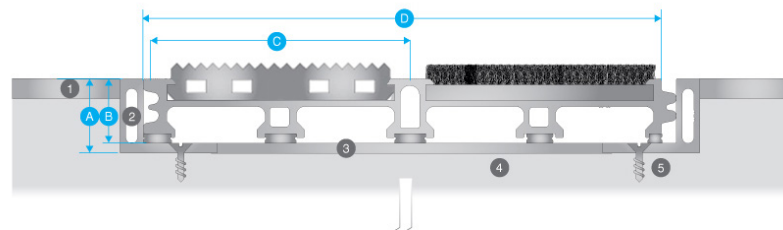

- A 19mm
- B 16.5mm
- C 66.4mm profile
- D 132.8mm plank size
- 1 Finished floor surface
- 2 Recessed matwell frame
- 3 Levelling latex to matwell base
- 4 Screed sub-floor
- 5 Screw fixings


## PROFILE COLOUR OPTIONS



Standard



Bronze



Black






# INSERTS


## INSERTS - ZONE 2

### INTRAlux® Elite

Recommended for effective scraping and dirt removal

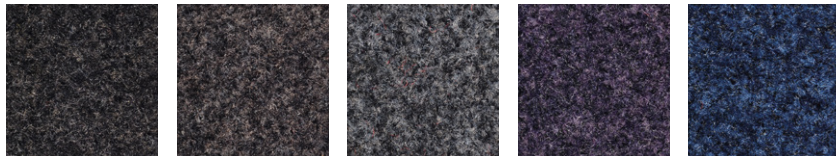


608 Black      607 Anthracite      606 Grey      609 Purple      602 Blue

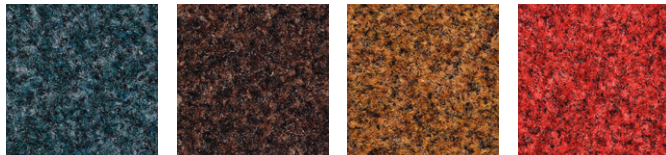


610 Turquoise      605 Brown      604 Coco      601 Red

### INTRAlux® Linear



443 Anthracite      451 Grey

### INTRAlux® Select



208 Black


### INTRAlux® Ultimate

Recommended for rapid moisture absorption

**PUREBASE®**




906 Night Sky      907 Anthracite      910 Stone      912 Lichen      913 Forest Green

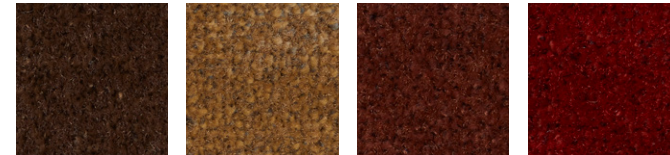

905 Truffle      904 Sandstone      914 Terracotta      901 Ruby

## INSERTS - ZONE 1

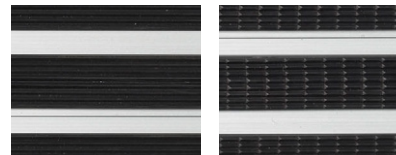

Ribbed Rubber      Multi Directional Rubber





# ENVIRONMENT & SUSTAINABILITY

INTRAsystems has an undeviating commitment to act responsibly in its care of the environment. Working on key projects throughout the UK and Europe, the company is familiar with all environmental ratings such as Ska, BREEAM and WRAP to help clients achieve, and exceed, their sustainability goals.

We are ISO 14001 accredited and all production processes are managed in accordance with the Waste Management Act, with a clear goal to 'reduce the production of waste and its harmful effects.' INTRAsystems regularly reviews its wider operations to minimise negative environmental impacts.

Our Environmental Sustainability Statement sets clear targets for ongoing improvement to ensure the company continues to play its part in helping tackle the climate crisis. Environmental credentials for each fibre option are provided and highlighted throughout this brochure.



**BREEAM®**

## ECONYL®

### Benefits of specifying ECONYL® fibre

ECONYL® is regenerated nylon that would otherwise pollute the Earth. It is the same as brand new nylon and can be infinitely recycled, recreated and remoulded. ECONYL® is Cradle-to-Cradle certified and therefore our fibres are eligible for LEED® v4 points, as part of the LEED green building rating system.

## PUREBASE®

### Benefits of specifying PureBase backing

PureBase is a new, PVC-free backing material for entrance matting. It has a significantly lower environmental impact in terms of production processing, greenhouse gas emissions and end of life waste disposal. PureBase is 20% lighter and 3 x more flexible for easier handling and installation.













CPD  
PROVIDER

Find us on:



NBS

bimstore



INTRA.  
SYSTEMS

6 COBHAM ROAD, WIMBORNE, DORSET, BH21 7PE

01425 472000 [INTRASYSTEMS.CO.UK](http://INTRASYSTEMS.CO.UK)

INTRAFORM® DM V1.0